



TILES & STONE

FIXING SOLUTION

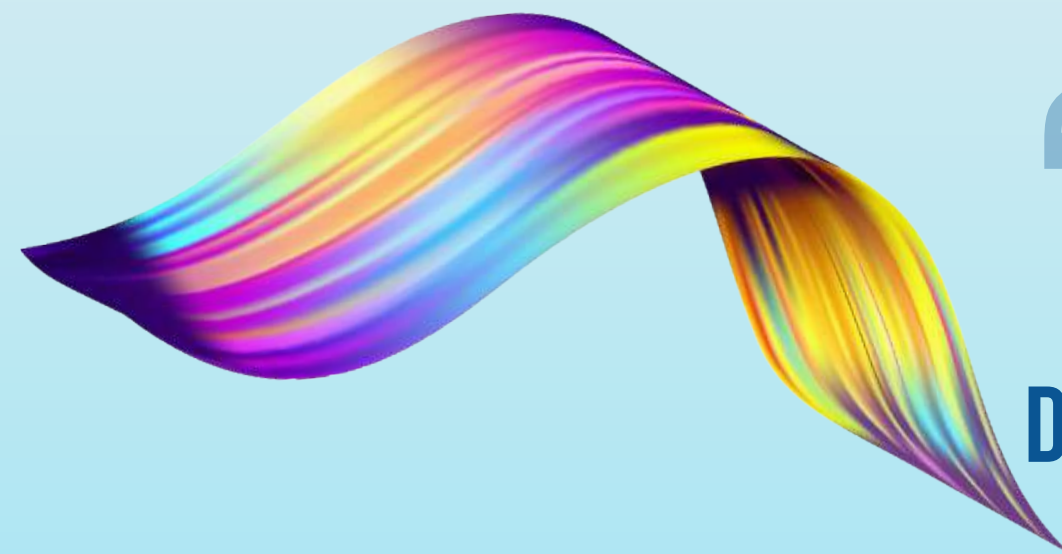

“ ONE STEP
FOR YOUR
DREAM HOME ”

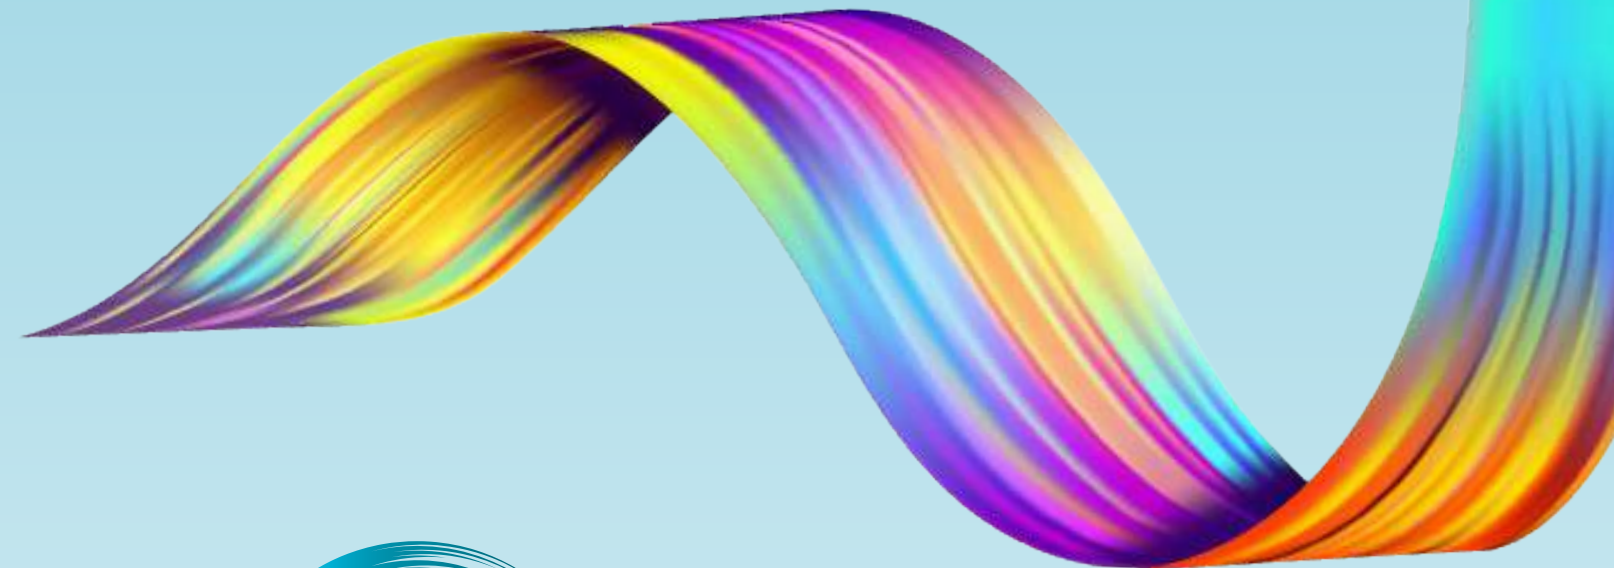

HawkGuard®
TILE & STONE FIXING SOLUTION


✉ Info@leafpaints.com

🌐 Leafpaints.com

HS INFOGRAPHICS
+91 - 875 875 5200

HawkGuard®
TILE & STONE FIXING SOLUTION

PREMIUM COVER BLOCK

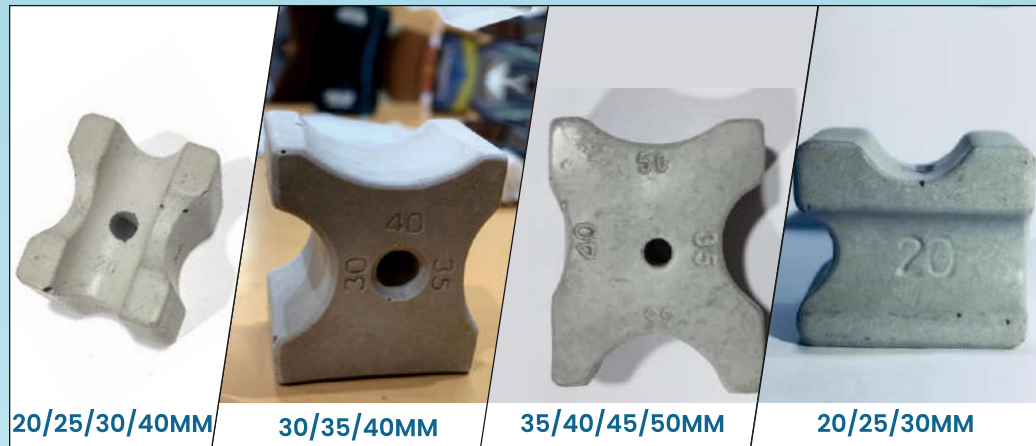

Leaf Paints HawkGuard PREMIUM COVER BLOCKS help the framework of the TMT state of Equilibrium. Its provides adequate space between the framework and the shuttering.

ADVANTAGES

Cover blocks are used for the many following reasons:

- To protect the steel reinforcement bars from environmental effects to prevent their corrosion.
- Provide thermal insulation, which protects the reinforcement bars from fire.
- Give reinforcing bars sufficient embedding to enable them 'to be stressed without slipping.

TILE SPACER

Leaf Paint HawkGuard TILE SPACER is a plastic product used to adjust the size of the tile seam. The seams of the tiles are not only to deal with the problem of irregular specifications, but the most important thing is to reserve the position for thermal expansion and contraction.



ADVANTAGES

- Made of high-grade PP material, with exquisite workmanship and excellent quality, sturdy and durable to use.
- System ensures that your tile installation will be leveled on the point tile to tile, and preventing tiles from warping.
- Improving the installation speed, our tile spacer can help installer to save much time reduce their fatigue and stress.
- For DIY and professional use, no additional assembly tools needed, very easy to install and remove.
- Helps achieve perfectly straight grout lines for various types of tile installation.
- Size can be from 1.0mm to 10.0mm to suit match different size tiles for your different application.

GALITER

Leaf Paints HawkGuard Chamak Is Epoxy grout Glittery metallic compound comes in bright vibrant colors Gold, with LP HawkGuard epoxy grout shades to ceramic tile, vitrified tile and mosaic tile joints. It sparkle tile joints and it add up a new beautiful look to your tiling projects.

Benefits : Maintain Hygiene Uniform Colour Non-cracking Chemical Resistant Minimum Maintenance Excellent Adhesion Grouting On : Ceramic Tiles Vitrified Tiles Porcelain Tiles Mosaic Marbles Granite And Stones Recommended Area :Commercial Area, Residential Area



VISION:

We revolutionize the industry by providing innovative, high-performance products that simplify and enhance the tile installation process. The company aims to be at the forefront of technology, constantly pushing the boundaries of adhesive solutions to meet the evolving needs of both professional contractors and do-it-yourself enthusiasts. With a focus on sustainability, the company also strives to develop environmentally friendly adhesive formulations that minimize the impact on the environment. Ultimately, the vision is to become the go-to brand for tile adhesive products, known for their exceptional quality, reliability, and ability to deliver outstanding results. In order to make this possible, we combine knowledge experience and hands on approach with a range of high quality products. We prefer to build a long term partnerships rather than focus on short term profits. In addition we are continuously working to expand our range of products.

OUR PRODUCT RANGE



DESCRIPTION

LEAF PAINTS RED OXIDE PRIMER is an economic alkyd based primer suitable for mild steel surface. Red Oxide Primer is an oil modified alkyd based primer suitably pigmented with micro fine red oxide and extenders. This metal oxide primer is ideal for ferrous metal surfaces. It is free from heavy metals like lead, mercury and chromium.

SPECIAL FEATURES

- Formulated with special micronized red oxide, to prevent corrosion.

PREPARATION

- The surface must be clean, smooth, sound, dry, free from wax, dust and contaminates. The bare metal should be clean and free from rust. Existing rust may be removed with Rustin's Rust Remover.

COATS

- 1 coat is usually sufficient. A second coat may be applied if required. Sand lightly between coats if required.

COVERAGE

- 3.25sq.m or 35 sq ft per 250ml tin, depending on the absorbency of the surface.

RED OXIDE METAL PRIMER

DRYING TIME

- 4-8 hours depending on temperature and humidity.

SHELF-LIFE/STORAGE

- Many years if stored in original tightly closed container in normal conditions.

SIZES

250ML, 500ML & 1LTR

HAZARDS

- Flammable. Keep out of reach of children.
- Use only in well ventilated areas.
- Keep away from sources of ignition -no smoking.
- Avoid contact with skin and eyes.
- After contact with skin, wash immediately with plenty of soap and water or a proprietary skin cleanser.
- Do not use solvent or White Spirit.



WHITE CEMENT BASED
PREMIUM
WALL PUTTY

DESCRIPTION

LEAF PAINTS A WHITE CEMENT BASED PREMIUM WALL PUTTY is famously used for interior and exterior walls. It is made using special additives and fillers to multitask as a putty, sealer, and filler over plaster or concrete walls. White cement, minerals, and polymers are mixed together to form a white cement based premium wall putty. They come in dry form and release no unpleasant odour as you apply them on the wall.

BENEFITS

- Wall putty paint gives a smoother finish to the wall.
- It effectively waterproofs the wall and retains moisture.
- The paint is glued perfectly to the wall with the help of a wall putty colour.
- It does not flake easily to damage your wall.
- You can use wall putty to increase the lifespan of your expensive paint.

HOW TO USE

- If you're planning to paint a new masonry surface, give it some time to cure before applying the wall putty paint. Experts recommend at least 6 months to cure the masonry surface before starting to work on it.
- Clean the surface thoroughly before applying the putty. Any unevenness or visible dust or algae could affect the quality of your paint. Remove the loose paint, grease, or dust on the surface of your wall by using good quality sandpaper.
- If there is any growth of algae or fungus, remove it using a wire brush and water.
- Use a soft cloth to clean the surface of the wall.
- Now apply one of the Leaf Paints putty types to fill the imperfections on the wall.
- Let it dry for 4 to 6 hours before proceeding further.
- Use the sandpaper to smoothen the surface and wipe it with a soft towel.

STORAGE

- Store Leaf Paints Wall Putty in a dry place.
- Open the bag just before use.

PACKAGING

20kg
40kg

COUPON

30Rs & 50Rs



NTA A1

GREY ADHESIVE

DESCRIPTION

LEAF PAINTS HAWKGUARD NORMAL (NTA A1 GREY) Is A Polymer Modified Adhesive. It Is Specially Formulated For Normal Application. This High-performance Adhesive Is Designed To Provide Exceptional Bonding Strength And Durability, Ensuring A Long-lasting And Secure Installation Of Tiles. Its Easy-to-use Consistency Allows For Effortless Application, Ensuring A Smooth And Even Finish. Tile Adhesive Is Also Water-resistant, Making It Ideal For Use In Wet Areas Such As Bathrooms And Kitchens..

FEATURES

- Single component, just add water.
- Polymer modified adhesive.
- Economical & Easy to use.
- Allows hassle-free application with minimum labour.
- Self-curing properties.
- For concrete/plaster surface.
- Water resistant-suitable for wet areas.
- Can be used in internal areas, for floor as well as wall application.

PACKAGING UNITS

20 KG

COLOUR

GREY

COUPON

20 Rs.

COVERAGE

APPROX -
5 TO 5.5M' / 20 KG BAG
AT 3 MM BED THICKNESS



DESCRIPTION

LEAF PAINTS HAWKGUARD (HTA A2 GREY) is a polymer-modified high performance adhesive, thin-set tile adhesive for fixing ceramic, semi-vitreous tile, vitrified tiles & natural stones of regular size. It is suitable for both vertical and horizontal surfaces, over the cementitious substrate for indoor/outdoor application, in dry as well as wet areas. It is also recommended for Tile on Tile Application.

FEATURES

- Very high bond strength
- Non-slip.
- Economical & Easy to use.
- Water & shock resistan-suitable for wet areas & commercial floor too.
- Sag Resistant formula-provides hassle -free application on vertical walls.
- Single component, just add water.
- Deformable to accommodate minor shocks.
- Polymer modified provides high adhesion.
- Long open time-suitable for large format & external condition.
- Good adhesive bond strength & bonds to various cement-based substrates.
- Polymer modified provides high adhesion, for fixing a variety of tiles and stones.

PACKAGING UNITS

20 KG

COLOUR

GREY

COUPON

30 Rs.

COVERAGE

APPROX -
5 TO 5.5M' / 20 KG BAG
AT 3 MM BED THICKNESS

DESCRIPTION

LEAF PAINTS HAWKGUARD SBR CONREPAIR is based on styrene butadiene latex. it is a ready to used bonding agent in liquid consistency, **SBR CONREPAIR** is used for repair of floor, columns chhajans, slabs, beams, and water proofing of terraces, toilets, bath-rooms etc., as it bonds strongly to old and new concrete and plaster. it prevents cracking, pick up dust, improves abrasion resistance reduces shrinkage.

FEATURES

- Multipurpose** : Robust product that is economical, easy to handle and has multiple applications.
- Easy to mix** : Compatible and faster mixing promoting workefficiency.
- Multipurpose** : Improved flexibility, low water-cement ratio andresistant to water penetration.

APPLICATION AREA

- For waterproofing of roof, terraces, floors, columns, chhajjas, slabs, beams, toilets, bothrooms, lift pits, balconies, staircases liquid & effluent thank, decks & walkways.
- For concrete repair of floors, columns, chhajjas, parapets, slabs etc.
- For bonding mortal for tiles and panels, as rendering coat for chemical resistant floors.
- For bonding, fixing of slip of old concrete to new concrete, plastering, masonry stone work etc.
- For cladding, fixing, of slip bricks, stones, tiles and marble bedding.
- As bonding slurry coat for pinhole treatment on concrete surface, weatherproof & frost resistance render, high wear & ame resistant render and as repair mortar for overhead application.

PACKAGING UNITS

500gm, 1kg, 5kg & 10kg



ROOF WATERPROOFING

RW+

DESCRIPTION

LEAF PAINTS HAWKGUARD RW+ is specially formulated integral liquid waterproofing compound composed of surface active plasticizing agents, polymers & additives. It is used as an additive for cement concrete, mortar & plasters. It makes concrete cohesive and prevents segregation.

FEATURES

CORROSION RESISTANT : Makes concrete more cohesive, hence protects steel better against corrosion

Compatibility : Being a liquid, easily dispersible & compatible with concrete/mortar mixes.

Permeability : It reduces the permeability of water into concrete.

Strength : The setting time and compressive strength of the concrete remains within the specification limits.

Shrinkage : Reduces shrinkage crack development in plaster & concrete. Workability – Improves workability of freshly mixed cement concrete.

Durability : Increases durability by improving waterproofing of concrete.

METHOD OF APPLICATION

- Charge Cement & Aggregates To Concrete Mixer As Per The Mix Design, Mix In Dry State For 1–2 Minutes.
- Start Addition Of 75–80% Mixing Water & Mix For 2–3 Minutes.
- Leaf Paints Hawkguard Rw+ Is Added As Per The Recommended Dosage Into The Remaining Mixing / Gauging Water, Then Add To Concrete Mixer & Mix For Another 2 Minutes.
- Place The Concrete Or Apply Plaster, As Needed.
- Cure The Applied Mortar Or Concrete As Per Good Construction Practices.

Shelf Life & Storage

- Best before 18 Months from the date manufacture when in sealed pack and stored under proper condition.
- Store in a cool & dry place.

PACKAGING UNITS

1, 5, 10, 20 & 50 litre



APPLICATION AREA

Waterproofing of concrete and sand-cement mortars used in

BASEMENTS

ROOF SLABS AND SCREEDS

WATER TANKS & WATER RETAINING STRUCTURES

EXTERNAL PLASTERING

BATHROOMS AND BALCONIES

SUMPS AND DRAINS



HTA A2 PRO

WHITE ADHESIVE

DESCRIPTION

LEAF PAINTS HAWKGUARD (HTA A2 PRO WHITE) is a white cement high polymer-modified adhesive, thin-set tile adhesive for fixing marbles, natural stones & Tiles of regular size. It is suitable for both vertical and horizontal surfaces, over the cementitious substrate for indoor and outdoor application as per specification, in dry as well as wet areas. It is also recommended for imported Marbles Application.

FEATURES

- Very high bond strength
- Non-slip.
- Economical & Easy to use.
- Water & shock resistant-suitable for wet areas & commercial floor too.
- Sag Resistant formula-provides hassle-free application on vertical walls.
- Single component, just add water.
- Deformable to accommodate minor shocks.
- Polymer modified provides high adhesion.
- Long open time-suitable for large format & external condition.
- Good adhesive bond strength & bonds to various cement-based substrates.
- Polymer modified provides high adhesion, for fixing a variety of tiles and stones.

PACKAGING UNITS

20 KG

COLOUR

WHITE

COUPON

30 Rs.

COVERAGE

APPROX –
5 TO 5.5M' / 20 KG BAG
AT 3 MM BED THICKNESS



DESCRIPTION

LEAF PAINTS HAWKGUARD (MTA A3 WHITE) Is White Cement Based, High- Polymer Modified,high Strength Premium Quality Adhesive For Fixing Marbles. Mta A3 White Is Ideal For Light Colored Natural Stones, Italian Marbles, Glass Mosaic On Wall/floor In Interior/exterior Situations Up To 6mm Bed Thickness (can Be Averaged Up To12mm In Final Bed Thickness). It Is Deformable And Can Accommodateshocks Due To Impact Load And Heavy Traffic.

FEATURES

- Very high bond strength
- Non-slip.
- Water resistant-suitable for wet areas.
- Long open time-suitable format & external condition.
- Good adhesive bond strength & bonds to various cement-based substrates.
- Highly Polymer modified-provides high adhesion, allows to bond with variety of substrates, for fixing a variety of tiles and stones.
- Single component, just add water.
- Deformable to accommodate minor shocks.
- Bonds to various substrates.
- Sag Resistant formula-provides hassle -free application on verticle walls.

PACKAGING UNITS

20 KG

COLOUR

WHITE

COUPON

30 Rs.

COVERAGE

APPROX -
5 TO 6M' / 20 KG BAG
AT 3 MM BED THICKNESS

DESCRIPTION

LEAF PAINTS HAWKGUARD TILES CLEANER IS FAST ACTING ACID BASED CLEANER FOR REGULAR CLEANING, CERAMIC TILES FLOORS AND WALLS, OF DIRT AND STAINS ON TILE SURFACES, DESIGNED FOR DAILY MAINTENANCE OF TILES. IT IS ALSO USED AS RAPID REMOVAL OF SPOT/LAYER ALONG WITH WATER STAINS OVER TILES, CEMENT STAINS, GRIME, OIL, PAINT STAINS, WAX FROM CONCRETE, ASBESTOS, TERRAZZO AND CERAMICS.

FEATURES

- Single component, just mix with water.
- Cleans all types of tiles.
- Removes cement film.
- Fast action.
- Powerful formula.
- Removes residues.
- Removes efflorescence.
- removes most oxide stains.

AREA OF APPLICATION

- Wall tilling in kitchen.
- Toilets.
- Factories.
- General building sites.
- Domestic & commercial tilling area.
- Residential tilling.
- Floor Area.
- Internal & external tilling area.
- Bathrooms.
- garages.

PACKAGING UNITS

1 Ltr

COVERAGE

COVERAGE DEPENDS ON THE POROSITY
OF SURFACE AND INTENSITY OF STAINS
ON THE SURFACE.



THE GROUT ADMIXTURE

DESCRIPTION

LEAF PAINTS HAWKGUARD THE GROUT ADMIXTURE This is a single component polymer modified additive to be mixed with LP HawkGuard Tile Grout – Cement Based to enhance the performance properties and its durability. LP HawkGuard tile grout admixture is a superior quality cementations grout with hydrophobic properties that allow tile joints to resist water. Aqua Stick consists of the carefully prepared blend of Portland cement, chemical additives, and fillers. It is easy to install – just mix with LP HawkGuard tile Grout. Aqua Stick is ideal for floors and walls in both exterior and interior applications. Application Used for filling tile joints 1- 5mm in both interior and exterior areas, ceramic, vitrified, non-vitreous clay tile, natural stone and engineered stone/ agglomerates.

FEATURES

- Improves water resistance of grout.
- Improves the strength of grout.
- Unique cement based hydrophobic grout
- Improved efflorescence control
- Easy maintenance
- Non-shrinking & non-cracking

Mixing Ratio :

Use approx. 250 ml LP HawkGuard Tile Grout Admixture for 1 kg LP HawkGuard tile Grout. Varies with tile size and grout width

Packing Size:

100ML and 250ML

APPLICATION AREA

RESIDENTIAL

COMMERCIAL

EXTERNAL FACADES

WET AREAS



STA A4

GREY ADHESIVE

DESCRIPTION

LEAF PAINTS HAWKGUARD (STA A4 Grey) Is A High Polymer Modified, High Performance & High Strength Premium Quality Tile Adhesive Fixing Granites. **STA A4** Is Ideal For Fixing All Type Tiles, Granites , Natural Stones Regular And Large Size. It Is Suitable For Both Horizontal & vertical Surfaces, Over The Cementitious Substrate For Indoor & Outdoor Application. Best For Heavy Load Application.

FEATURES

- Single component, just add water.
- Bonds to various substrates.
- Ideal product for tile-on-tile applications on floor
- Polymer modified – provides adhesion, allows to bond with variety of substrates, for fixing a variety of tiles and stones.
- Economical & Easy to use.
- Water resistant-suitable for wet areas.
- Good adhesive bond strength & bonds to various cement-based substrates.

PACKAGING UNITS

20 KG

COLOUR

GREY

COUPON

30 Rs.

COVERAGE

APPROX –
5 TO 5.5M' / 20 KG BAG
AT 3 MM BED THICKNESS



DESCRIPTION

LEAF PAINTS HAWKGUARD WATER RETENTION GROUT IS HIGH POLYMER-MODIFIED WATER RESISTANT, CEMENT BASED GROUT FOR INTERIOR & EXTERIOR, FLOOR & WALL JOINTS OF WIDTH. THIS GROUT DESIGNED FOR GROUTING GLAZED WALL TILES, PORCELAIN TILES, MOSAIC, VITRIFIED & FULLY VITRIFIED TILES, NATURAL AND ENGINEERED STONE JOINTS OF WIDTH 1MM-6MM.

					
L GREY (LP332)	CAFFEINE (LP337)	TERRACOTTA (LP335)	MIDNIGHT BLACK (LP330)	GOLDEN YELLOW (LP336)	BROWN (LP331)
					
MILKY WHITE (LP334)	S BLUE (LP338)	L IVORY (LP333)	D GREEN (LP339)	OLIVE (LP331A)	PINK C (LP330A)

FEATURES

- Good bond strength.
- Water resistant.
- For interior & exterior use.
- Suitable for joint width of 1-3 mm.
- Weather resistant.
- Colour fast.
- Easy application and clean up.
- Easy maintenance.
- Non-cracking & Non-shrink.
- Self-Cured.
- Low VOC - For healthy living.
- Thixotropic-non slum application.

PACKAGING UNITS

1 KG

COLOUR

MIX-ALL

COVERAGE

AS PER TILES SIZE

DESCRIPTION

LEAF PAINTS HAWKGUARD Fort Pro Epoxy Grout is a Epoxy based adhesive. It is easily applicable in the joints of vitrified tiles, glass mosaic tiles and other tiles. Also, it is suitable for the joints of granite, natural stone, composite marble and quartz stone. The excellent feature of Fort Pro Epoxy Grout is that, it can be easily cleaned by Leaf paints HawkGuard tile cleaner with scrubber stipulated time.

Area of Application : **Leaf Paints HawkGuard** Fort Pro Epoxy grout is ideally suited for residential and commercial installation where the materials must resist physical abuse, stains, spillage and chemical attack. **Leaf Paints HawkGuard** Epoxy Base grout is applied in grooves of tiles used in kitchens, bathrooms, swimming pools, fountains, hospitals, operation theaters, sterilization rooms, restaurants, cafeterias and high traffic areas.

FEATURES

- Easy to install and clean
- Non cracking and powdering
- Stain free
- Hard and Durable Joints
- Temperature resistant
- Colour fast.
- Hygienic and chemical resistant
- Easy maintenance.
- High strength and versatile
- Stain and bacterial resistant
- Waterproof and durable finish

PACKAGING UNITS

1 KG & 5 KG

Kit	1 kg	5 kg
Resin	200gm	1kg
Hardener	100gm	500gm
Filler	700gm	3.5kg

COLOUR

Available in selected range of colors. Approx all

COUPON

40 Rs. & 200 Rs.

COVERAGE

APPROX - 5 TO 5.5M' / 20 KG BAG AT 3 MM BED THICKNESS